


# PLASTO-DRAIN 8 GEO



Properties	Values	Protective drainage sheet for foundation walls
Material		
• Dimpled sheet	HDPE	
• Geotextile	PP	
Colour		
• Dimpled sheet	black	
• Geotextile	white	
Thickness		
• Dimpled sheet (apprx.)	0.6 mm	
• Geotextile (apprx.)	136 g/m <sup>2</sup>	
Sheet width	2.0 m	
Area weight (apprx.)	750 g/m <sup>2</sup>	
Dimple height	8 mm	
Dimple spacing (apprx.)	1860 per m <sup>2</sup>	
Air gap (apprx.) between dimples	5.3 l/m <sup>2</sup>	
Drainage capacity (apprx.)	4.6 l/s/m 276 l/min/m 16,600 l/h/m	
Transmissivity of geotextile mat (apprx.)	100 l/m <sup>2</sup> /s	
<b>Compressive strength (apprx.)</b>	<b>250 kN/m<sup>2</sup> (25 t/m<sup>2</sup>)</b>	
Service temperature range	-40 °C to +80 °C	
Physiological properties	non-polluting for drinking water	

PLASTOFORM dimpled sheet products are resistant to a wide range of chemicals, impervious to root penetration, rot-proof and unaffected by soil bacteria and fungi.

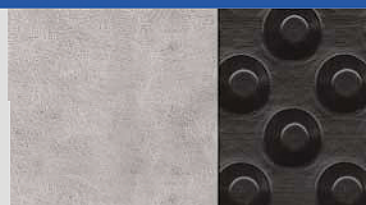