

# PLASTO-STONE

Synthetic flooring panels with «clinker-brick look» and drainage function for interior and exterior zones



**Examples of use:**  
Gardens, terraces, balconies, wintergardens, saunas, pool areas, camping.

- ◆ surefooted ◆ barefoot friendly ◆ insulant against heat and cold
- ◆ water leaking ◆ non-slip surface ◆ recyclable ◆ UV-stabilized

Material	Polypropylen PP
Size	33,3 x 33,3 x 1.2 cm
Stability	-20 to +70° C
Pressure	up to 20 tons per m <sup>2</sup>
Resistent	acids, bases, leaches
UV-stabilized	3 years
Panels per m <sup>2</sup>	9 panels
Edgeprofiles	33 x 5,5 cm
Cornerpieces	5,5 x 5,5 cm



# PLASTO-WOOD

Synthetic flooring panels with «wood look» and closed surface for interior zones



**Examples of use:**  
Cellars, screeds, balconies, partyrooms, garden houses, fitness areas.

- ◆ surefooted ◆ barefoot friendly ◆ non-slip surface
- ◆ insulant against heat and cold ◆ recyclable ◆ UV-stabilized



Material	Polypropylen PP
Size	33,3 x 33,3 x 1.2 cm
Stability	-20 to +70° C
Pressure	v m <sup>2</sup>
Resistent	acids, bases, leaches
UV-stabilized	3 years
Panels per m <sup>2</sup>	9 panels
Edgeprofiles	33 x 5,5 cm
Cornerpieces	5,5 x 5,5 cm



# PLASTO-STONE PLASTO-TEC PLASTO-WOOD PLASTO-PLAN PLASTO-RIP



An excellent flooring panel design that lends itself to varying applications. Simple to install with no tools needed. Non-slip surfaces, surefooted, withstanding heavy loads. These panels come in various colours and designs according to your preferences. Once installed, they speak for themselves.

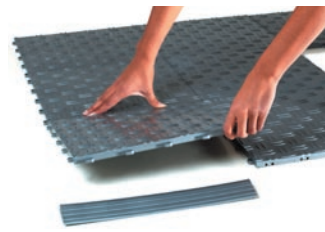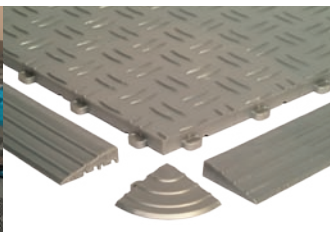


**PLASTOFORM**  
Kunststofftechnik  
Plastoform AG  
Rte de l'Aérodrome 243  
CH-1730 Ecuwillens  
Telefon +41 (0) 26 411 95 95  
Telefax +41 (0) 26 411 95 99  
www.plastoform.ch



# PLASTO-RIP


Synthetic flooring panels for interior and exterior zones

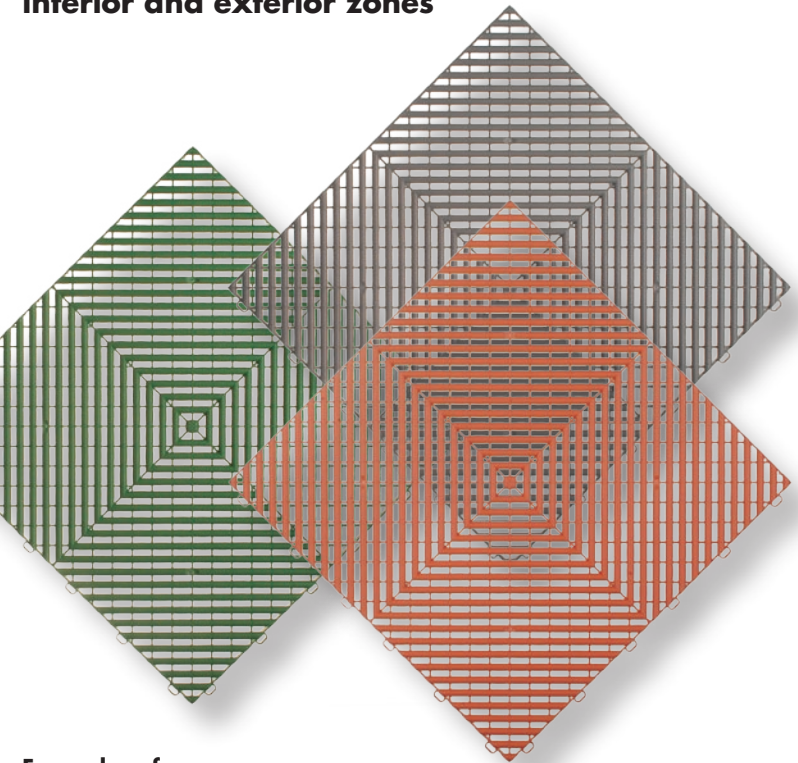

**Examples of use:**  
Gardens, terraces, balconies, wintergardens, saunas, pool areas, camping, motorsports.


- ◆ surefooted ◆ barefoot friendly ◆ insulant against heat and cold
- ◆ water leaking ◆ non-slip surface ◆ recyclable ◆ UV-stabilized

Material	Polypropylen PP
Size	40 x 40 x 1,8 cm
Stability	-20 to +70° C
Pressure	up to 25 tons per m <sup>2</sup>
Resistent	acids, bases, leaches
UV-stabilized	3 years
Panels per m <sup>2</sup>	6,25 panels
Edgeprofiles	40 x 6,2 cm
Cornerpieces	6,2 x 6,2 cm

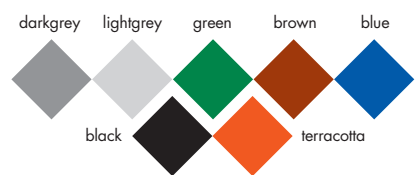

# PLASTO-TEC


Synthetic flooring panels with «checker plate structure»

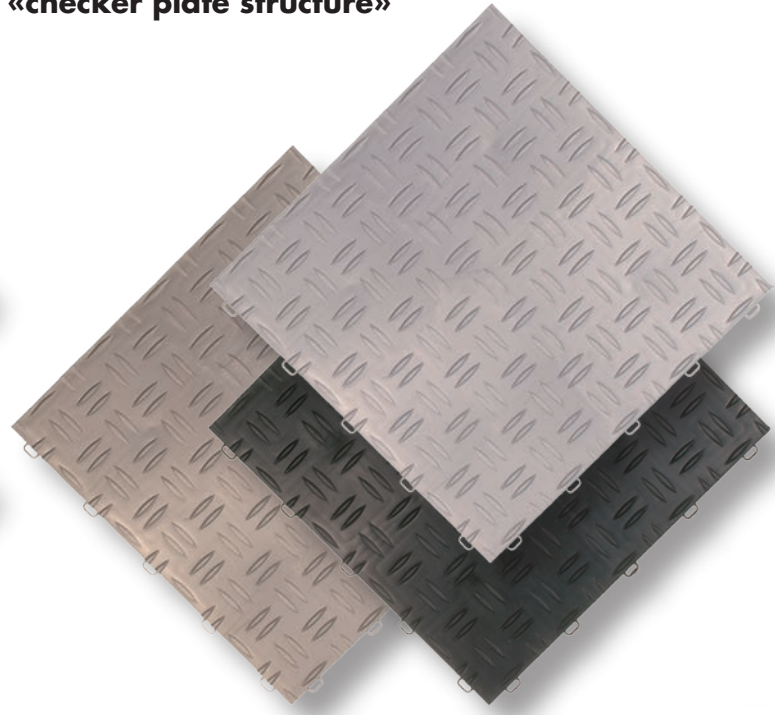

**Examples of use:**  
Expositions, exhibitions, trade fairs, showrooms, industrial halls, entrances, renovations.


- ◆ surefooted ◆ barefoot friendly ◆ non-slip surface
- ◆ insulant against heat and cold ◆ recyclable ◆ UV-stabilized

Material	Polypropylen PP
Size	33,3 x 33,3 x 1,3 cm
Stability	-20 to +70° C
Pressure	up to 25 tons per m <sup>2</sup>
Resistent	acids, bases, leaches
UV-stabilized	3 years
Panels per m <sup>2</sup>	9 panels
Edgeprofiles	33 x 5,5 cm
Cornerpieces	5,5 x 5,5 cm

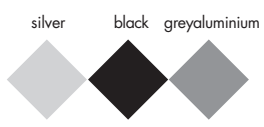

# PLASTO-PLAN

Synthetic flooring panels for interior and exterior zones

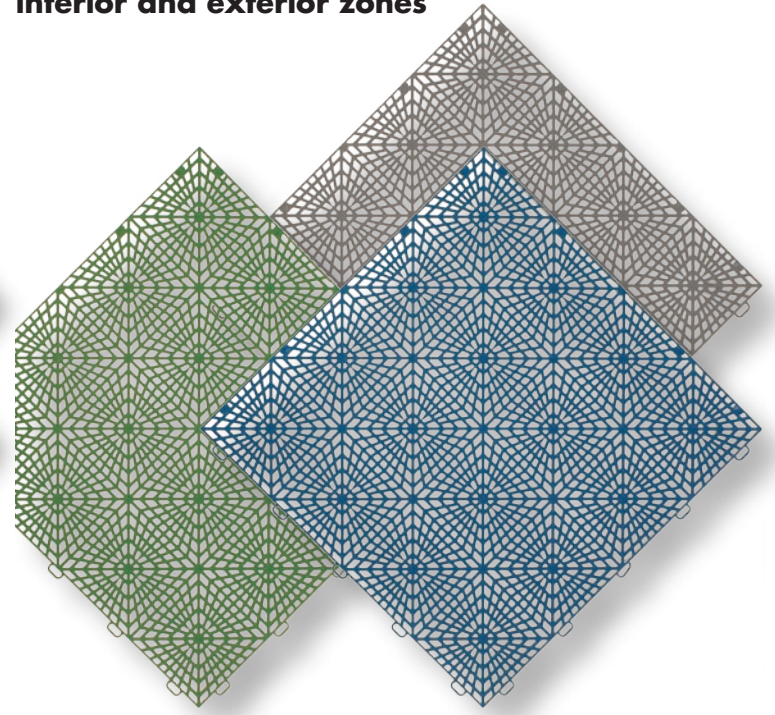

**Examples of use:**  
Gardens, alleys, terraces, wintergardens, saunas, pool areas, solariums, camping, sports.

- ◆ surefooted ◆ barefoot friendly ◆ insulant against heat and cold
- ◆ water leaking ◆ non-slip surface ◆ recyclable ◆ UV-stabilized

Material	Polypropylen PP
Size	33,3 x 33,3 x 1,2 cm
Stability	-20 to +70° C
Pressure	up to 15 tons per m <sup>2</sup>
Resistent	acids, bases, leaches
UV-stabilized	3 years
Panels per m <sup>2</sup>	9 panels
Edgeprofiles	33 x 5,5 cm
Cornerpieces	5,5 x 5,5 cm

